

BB-C and BB-V SERIES


VENTED OR SOLID BOTTOM AIR-FLOW SANI-TRAYS®



BB10-C and BB 10-V
with BB-1630P-3 dolly




BB-1630-5V, BB-9V, BB-10V
BB-10V and BB-10C

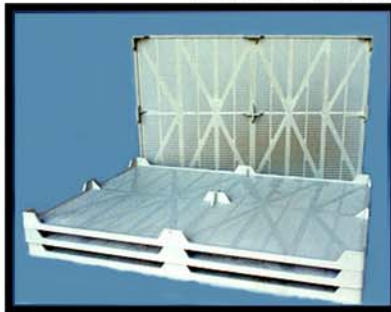

BB-2738/1.5V
(High temperature rated)



BB-2430-1C



BB-1630-3P dolly
and BB-1630A-5 dolly

		Exterior			Interior			Weight	
		Length	Width	Height	Length	Width	Wall Height		
BB-8C	Inches	30 1/2	16 1/4	3 1/4	29 1/2	15 1/8	1 1/2	4 1/4	Lbs
BB-8V	mm	775	413	83	749	384	38	1.9	Kg
BB-9C	Inches	30 1/2	16 1/4	4 3/8	29 1/2	15 1/8	2 7/8	4 1/2	Lbs
BB-9V	mm	775	413	111	749	384	73	2.0	Kg
BB-10C	Inches	30 1/2	16 1/4	2 1/2	29 1/2	15 1/8	1 1/2	3 9/16	Lbs
BB-10V	mm	775	413	64	749	384	38	1.7	Kg
BB-1630/5C	Inches	30 1/2	16 1/4	5 1/2	29 1/2	15 1/8	3 7/8	5 1/2	Lbs
BB-1630/5V	mm	775	413	140	749	384	98	2.5	Kg
BB-1024/5C	Inches	23 1/4	9 1/8	5 or 6	22 3/4	8 3/4	4 3/4	3 2/5	Lbs
BB-1024/6C	mm	591	232	127 or 152	578	222	121	1.5	Kg
BB-2430/1C	Inches	30	24	1.1	29	23	0.5	5	Lbs
	mm	760	608	27	736	581	13	2.3	Kg
BB-2738/1.5V	Inches	38	27	2	37	26	1 1/2	8 3/8	Lbs
	mm	965	686	51	940	660	38	3.8	Kg

Options: custom colors, solid bottom catch pans, plastic/stainless steel/aluminum dollies.

BB-Cs have solid bottoms, BB-Vs have slot vented bottoms.