


BB-2738/1.5

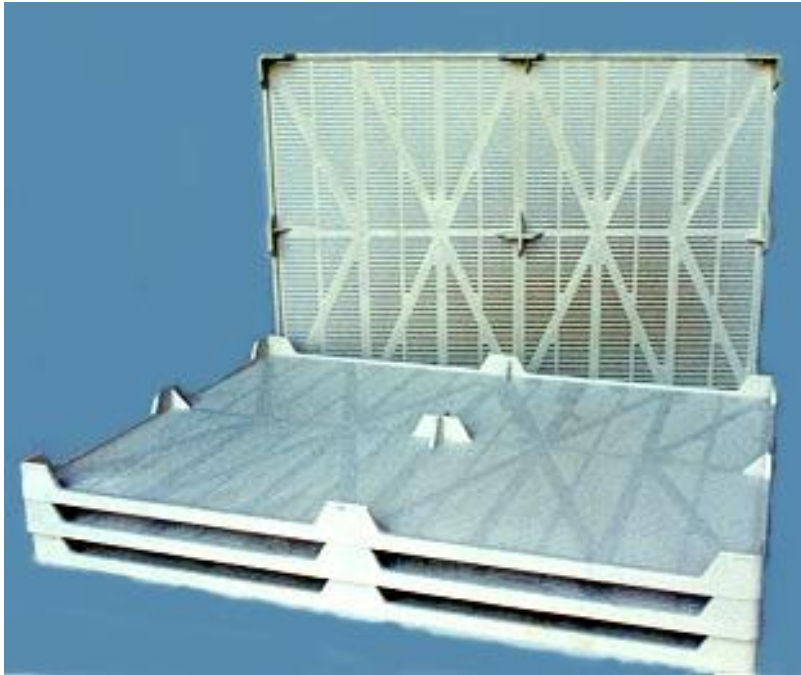

		<i>Exterior</i>			<i>Interior</i>				
		Length	Width	Height	Length	Width	Height	Weight	
BB-2738/1.5V	Inches	37 3/5	26 4/5	2	36 4/5	26	1 1/2	6.8	Lbs
	<i>mm</i>	<i>955</i>	<i>681</i>	<i>51</i>	<i>935</i>	<i>660</i>	<i>38</i>	<i>3.1</i>	<i>Kg</i>
BB-2738/1.5V HT	Inches	38 1/10	27 1/10	2	37 1/2	26 1/2	1 1/2	7.9	Lbs
	<i>mm</i>	<i>968</i>	<i>688</i>	<i>51</i>	<i>953</i>	<i>673</i>	<i>38</i>	<i>3.6</i>	<i>Kg</i>

*The BB-2738/1.5V HT is a high-heat resistant version of the BB-2738/1.5V

Intermediate Sidewall Height: .625"~ HT Intermediate Sidewall Height: 0.20"

ID Max Usable Height: 1.625" ~HT Max Usable Height: 1.7"

Bottom Tapered Slot Dimensions: 0.10" W x 2.4" L