

BB-C and BB-V SERIES

VENTED OR SOLID BOTTOM AIR-FLOW SANI-TRAYS®



1-508-674-2444 • solutions@wrh.net




BB10-C and BB 10-V
with BB-1630P-5 dolly




BB-1630-5V, BB-9V, BB-10V
BB-10V and BB-10C



BB-8C and BB-1630-5C
with BB-1630A-2UP dolly

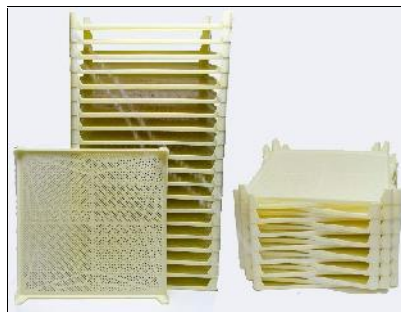

BB-3636-3V (3:1 nesting)



BB-1630-3P dolly
and BB-1630A-5 dolly

		<i>Exterior</i>			<i>Interior</i>				
		Length	Width	Height	Length	Width	Sidewall Height	Clearance Height	Weight
BB-10C	Inches	30.5	16.3	2.5	29.5	15.1	1.5	2.2	3.6
BB-10V	mm	775	413	64	749	384	38	56	1.7
BB-8C	Inches	30.5	16.3	3.3	29.5	15.1	1.5	2.8	4.3
BB-8V	mm	775	413	83	749	384	38	71	1.9
BB-9C	Inches	30.5	16.3	4.4	29.5	15.1	2.9	3.8	4.5
BB-9V	mm	775	413	111	749	384	73	97	2.0
BB-1630/5C	Inches	30.5	16.3	5.5	29.5	15.1	3.9	4.8	5.5
BB-1630/5V	mm	775	413	140	749	384	98	122	2.5
BB-2430/1C	Inches	29.9	23.9	1.1	29.0	22.9	0.5	0.8	6.0
	mm	760	608	27	736	581	13	13	2.7
BB-2738/1.5V	Inches	38.0	27.0	2.0	37.0	26.0	0.8	1.5	8.4
	mm	965	686	51	940	660	19	38	3.8
BB-3636/3V	Inches	35.6	35.6	3.8	34.5	34.5	0.8	3.0	9.0
	mm	904	904	97	876	876	19	76	4.1

Options: Custom colors, solid bottom catch pans, polymer/stainless steel/aluminum dollies.
Note: BB-Cs have solid bottoms, BB-Vs have slot vented bottoms.

Invest in equipment under compliance.

WRH products are proudly made in the USA to NSF standards from FDA-grade materials.

